



ABLOY® PE920, PE923


– *Double exit door solutions*

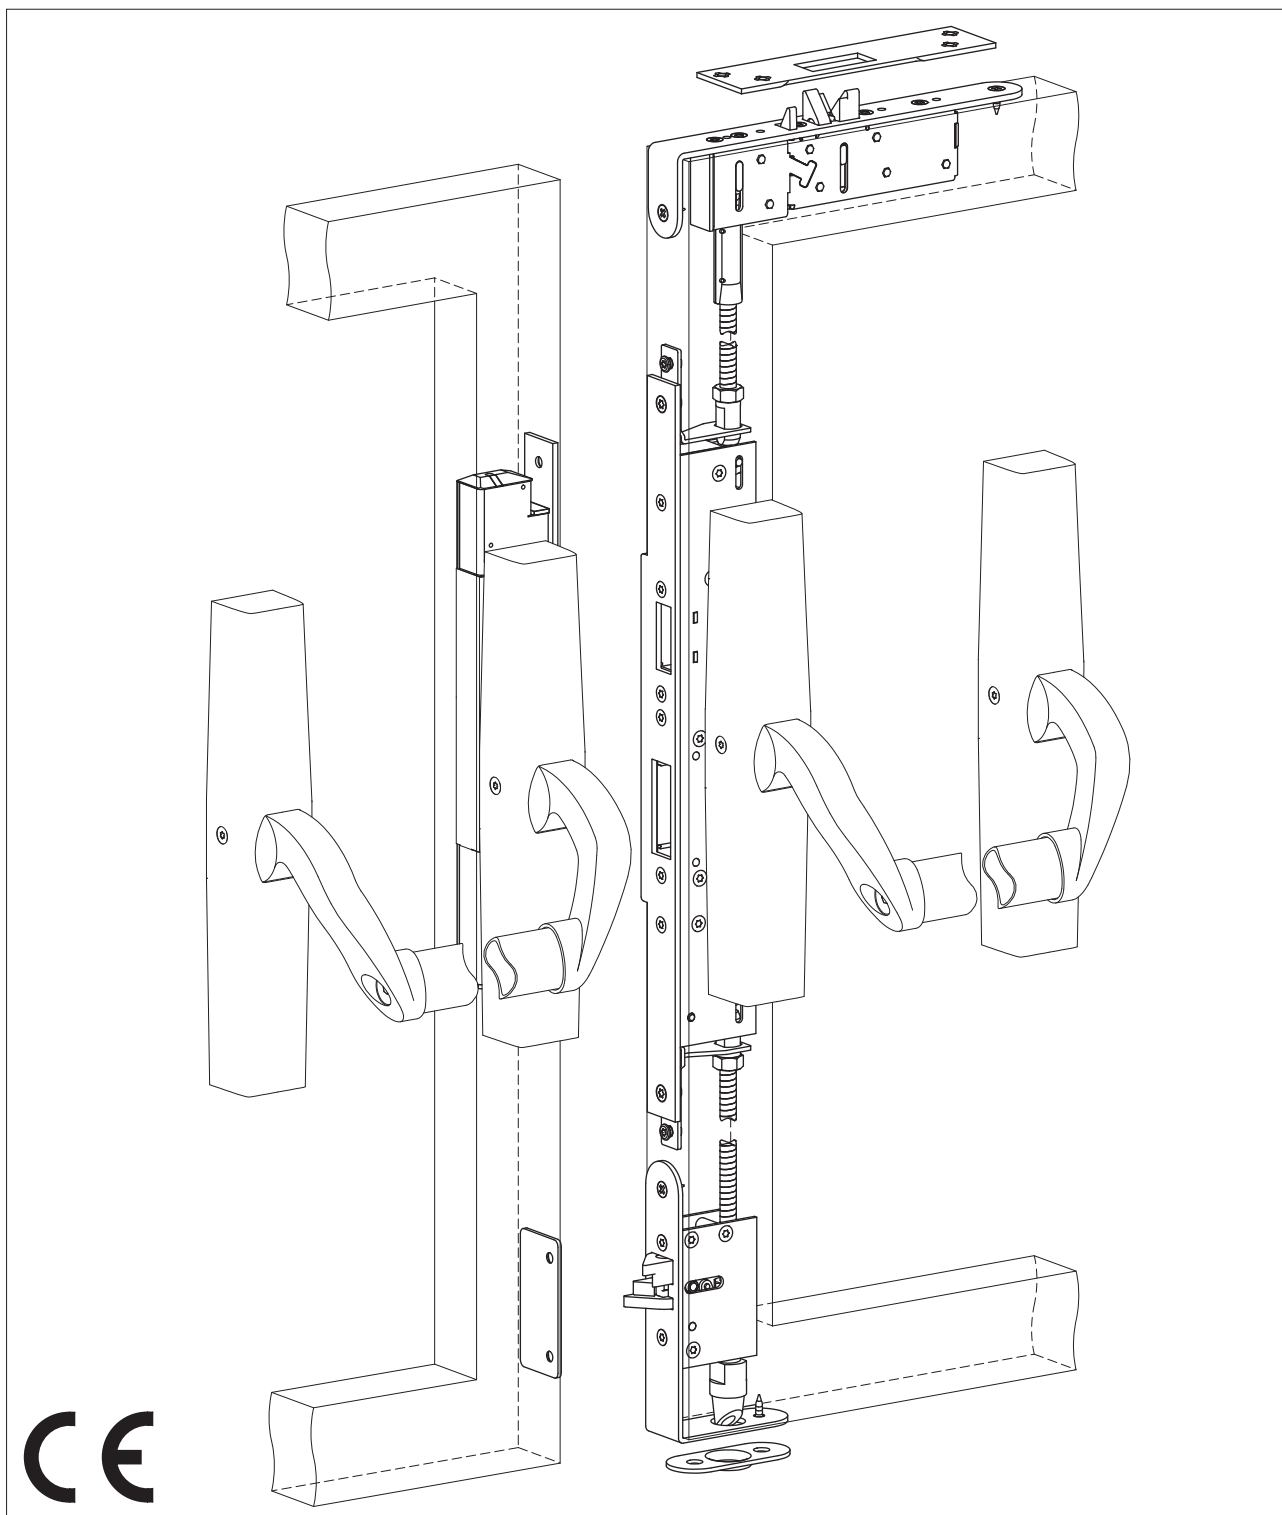


PE920, PE923

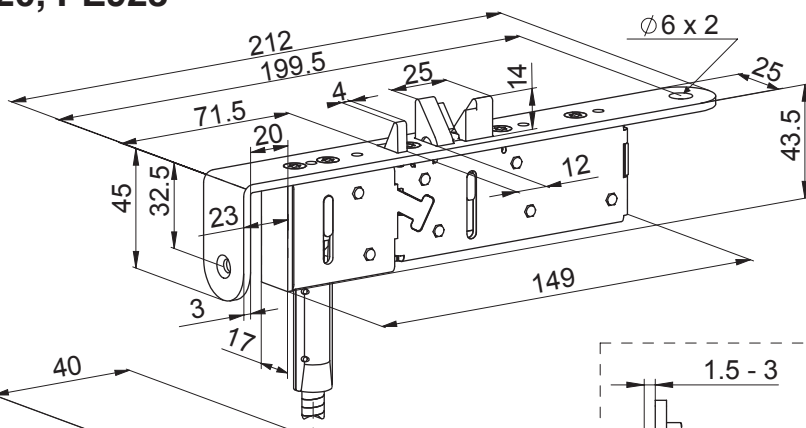


LE931, PE941

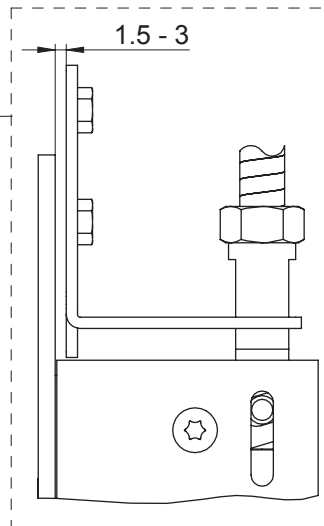

LE945

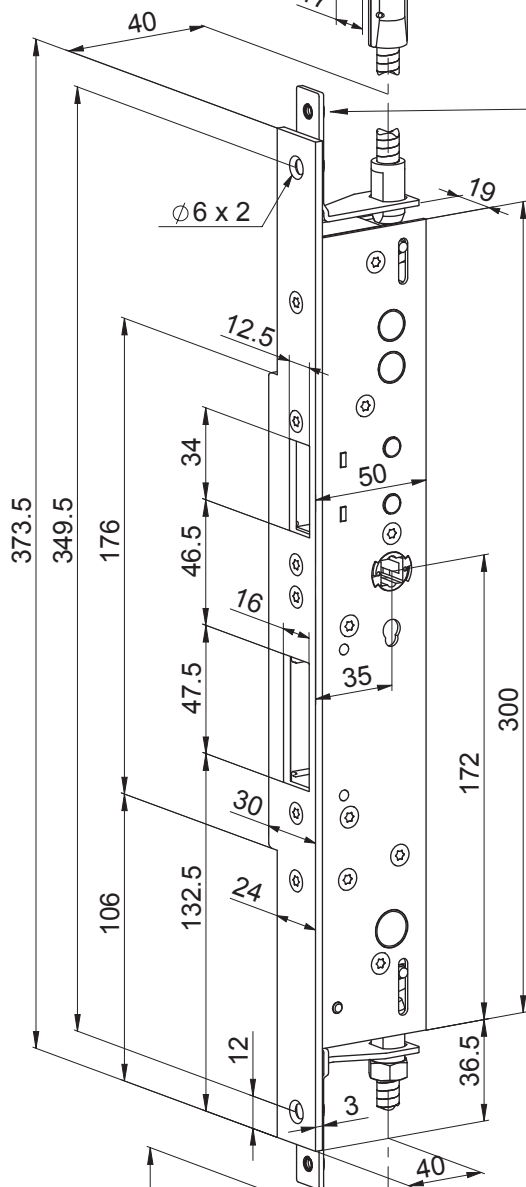

LE935

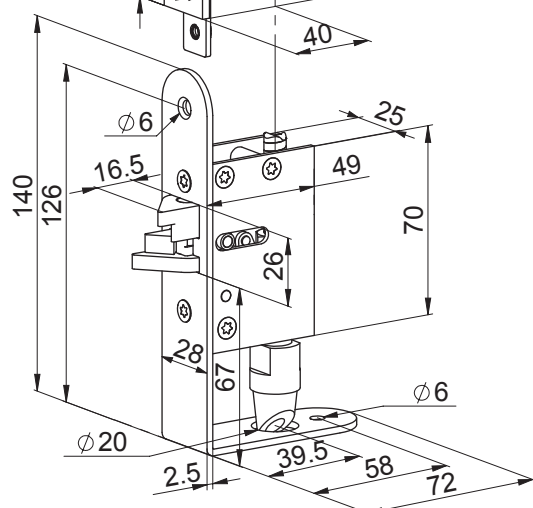


Contents	ENGLISH	INSTALLATION OF LE935, EXIT-LATCH (C) 10
		INSTALLATION OF TOP ROD (D) 11
TECHNICAL DETAILS 4		INSTALLATION OF LE945 (E) 12
STANDARDS 4		INSTALLATION OF LE931, PE941, TOP LOCK
EN179, EN1125 5 - 6		CASE (F) 13
DOOR GAB GUIDE 7		SETTING OF LE931, PE941, TOP LOCK CASE (G) 13
DRILLING DIAGRAM, DOOR 8		READY (H) 14
DRILLING DIAGRAM, STRIKE PLATES 9		LE931, PE941 REMOVING, TOP LOCK CASE (I) 14
INSTALLATION (A) 10		PE951 TECHNICAL DETAILS 15
INSTALLATION OF LOWER ROD (B) 10		FITTING EXAMPLES 15

ACTIVE X	PASSIVE:	A	B	C	STANDARD
PE060, PE062, PE460, PE462 *)	PE920	LE945	LE931	LE935	EN 179, EN 1125
PE420, PE422 **)	PE923	LE945	PE941	LE935	EN 179, EN 1125

*) Manual 952226

**) Manual 952225

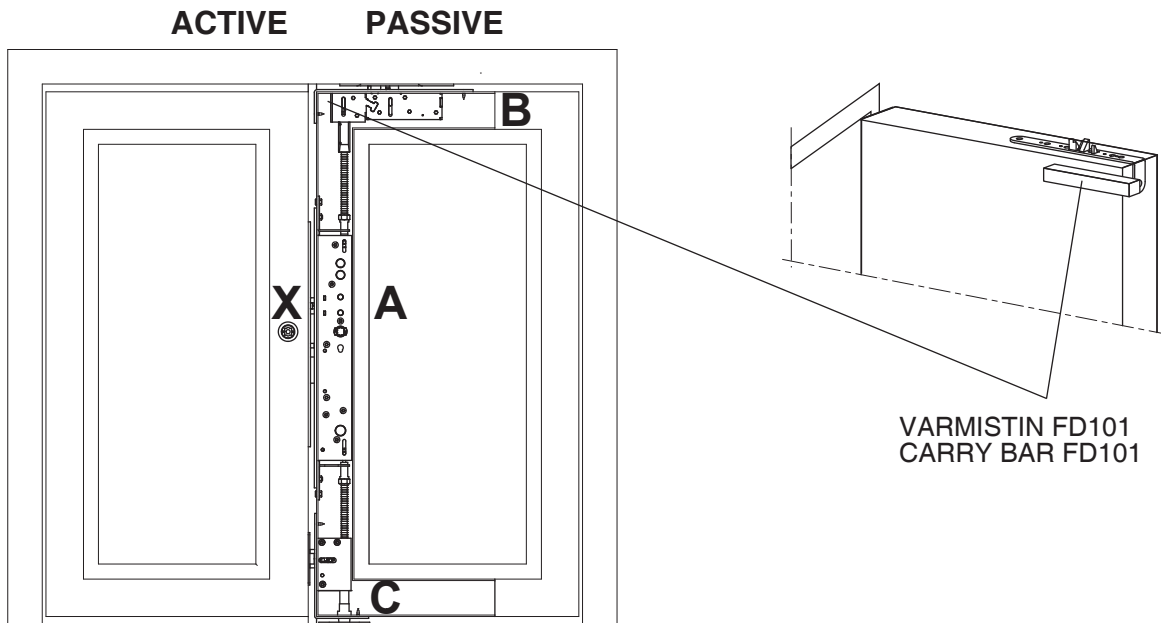






EN 14846
-25 °C - +70 °C

EN 179: 2008	3 7 6 B 1 3 4 2 A C	Exit
EN 1125: 2008	3 7 6 B 1 3 2 1 A C	Panic exit
EN 1634-1		Fire
EN 61000-6-1: 2007		EMC
EN 61000-6-3: 2007		EMC
EN 14846	-	LE945, PE945

The safety features of this product are essential to its compliance with EN 14846. No modification of any kind, other than those described in these instructions, is permitted.

EN 179

EN 1125

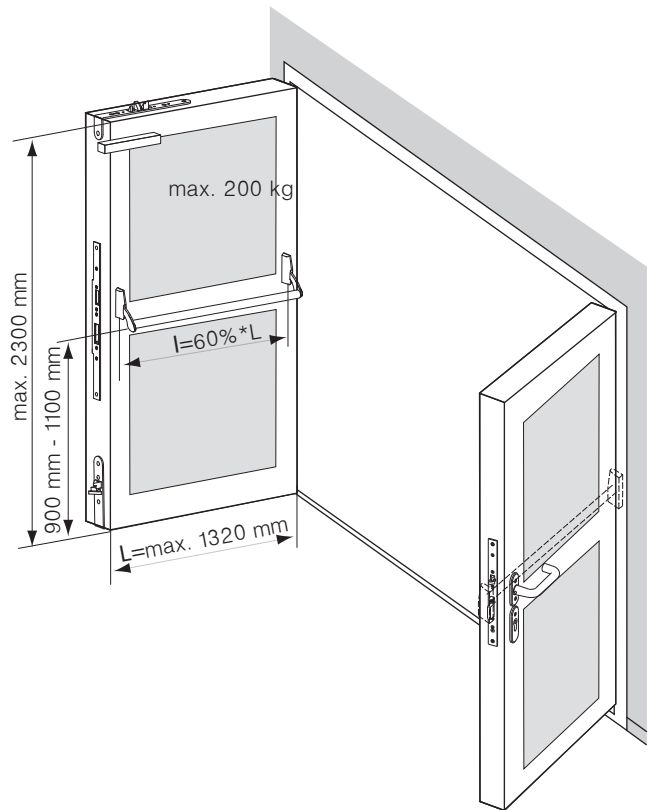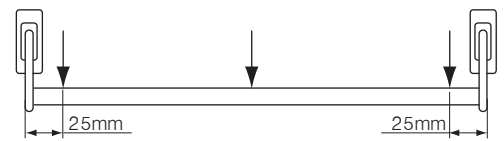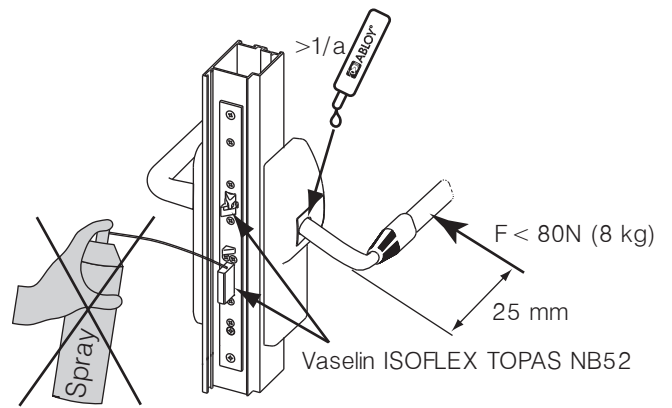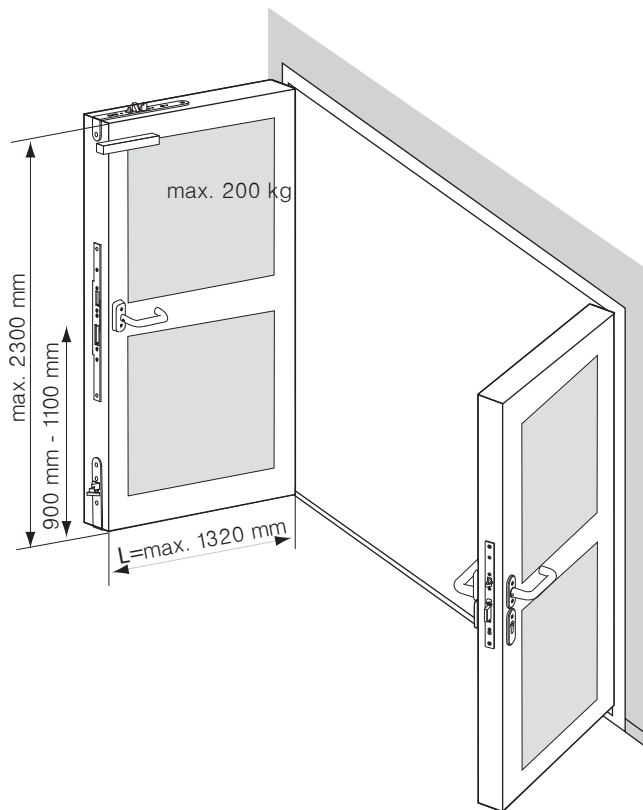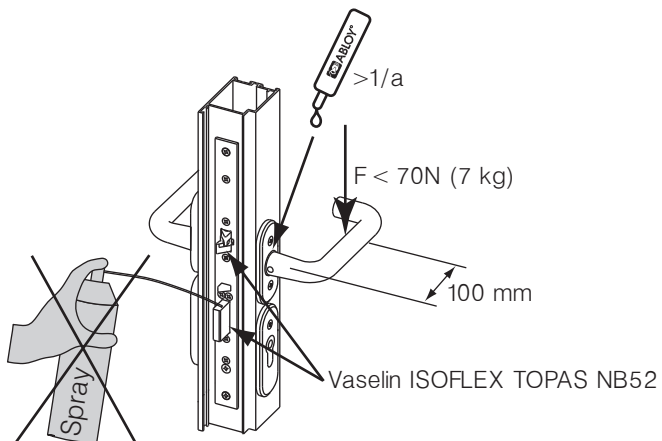



EN 179	ABLOY® DO 20.33.01 DO 20.33.02	IKON DO 20.15.01 DO 20.15.02	FSB DO 20.03.01, DO 20.03.02		HEWI DO 20.13.01, DO 20.13.02	SAPEX DO 20.32.01 DO 20.32.02
PE920, PE923	e.g. ABLOY® INOXI 3-19/013 PZ+BL	e.g. S6B3, S6B6	10 1001 79, 06 1004 79 RTG/RTV, 10 1004 79, 06 1004 79 RTG/RTV, 10 1016 79, 06 1016 79 RTG/RTV, 10 1023 79, 06 1023 79 RTG/RTV, 10 1035 79, 06 1035 79 RTG/RTV, 10 1045 79, 06 1045 79 RTG/RTV, 10 1070 79, 06 1070 79 RTG/RTV, 10 1078 79, 06 1078 79 RTG/RTV, 10 1093 79, 06 1093 79 RTG/RTV, 10 1107 79, 06 1107 79 RTG/RTV, 10 1108 79, 06 1108 79 RTG/RTV, 10 1119 79, 06 1119 79 RTG/RTV, 10 1146 79, 06 1146 79 RTG/RTV, 10 1159 79, 06 1159 79 RTG/RTV, 10 1160 79, 06 1160 79 RTG/RTV, 10 1163 79, 06 1163 79 RTG/RTV, 10 1189 79, 06 1183 79 RTG, 10 1222 79, 06 1222 79 RTG/RTV	111, 111.23, 114.23GK, 131, 132, 111X, 113X, 114X, 161X, 163X, 171X, 112X, 165X, 166X	e.g. 60-00819	
	ABLOY® INOXI 3-19/013/120 PZ+BL	e.g. S6B8				

EN 1125	effeff DO 30.04	JPM DO 30.05	HEWI DO 30.10
PE920, PE923 EL462, EL262, EL062	8000-00-1100 (-), 8000-10-1100 (PZ) 8000-00-1100 (-), 8000-11-1100 (RZ)	NORMA 990000-XX-0A, 990100-XX-0A, 990001-XX-0A, 990101-XX-0A, 991000-XX-0A, 991100-XX-0A, 991001-XX-0A, 991101-XX-0A	HEWI PS 160XA 40°













! The safety features of this product are essential to its compliance with EN 179/EN 1125. No modification of any kind other than those described in these instructions, are permitted.

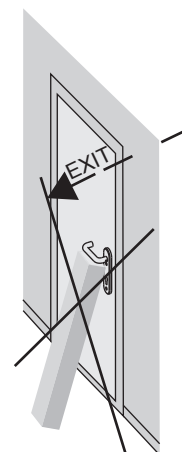






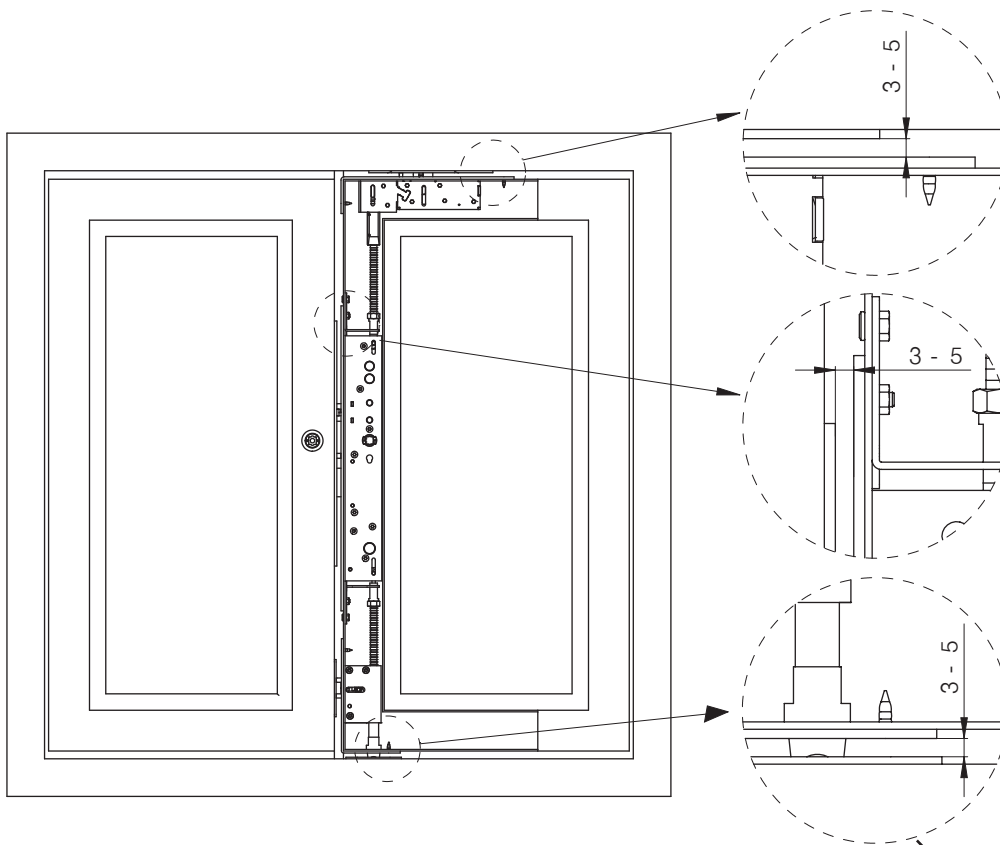


Default

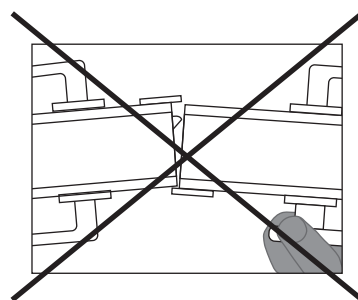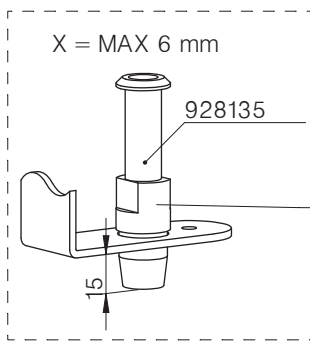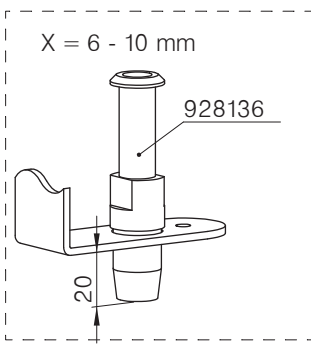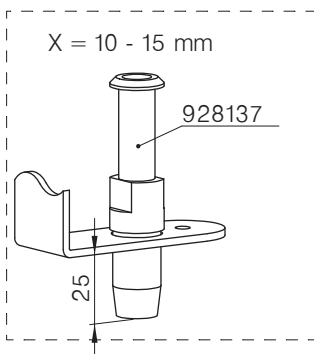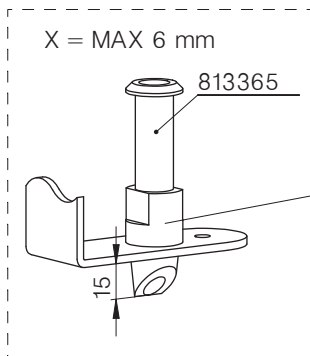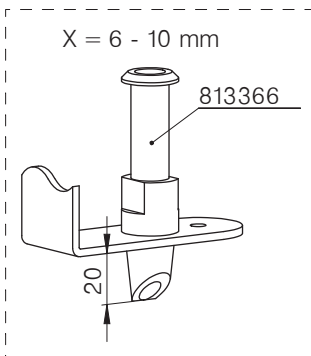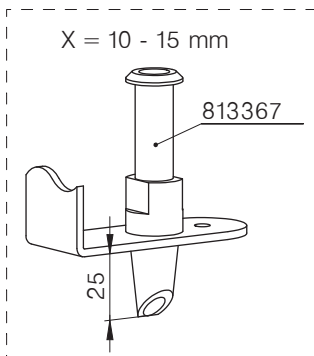




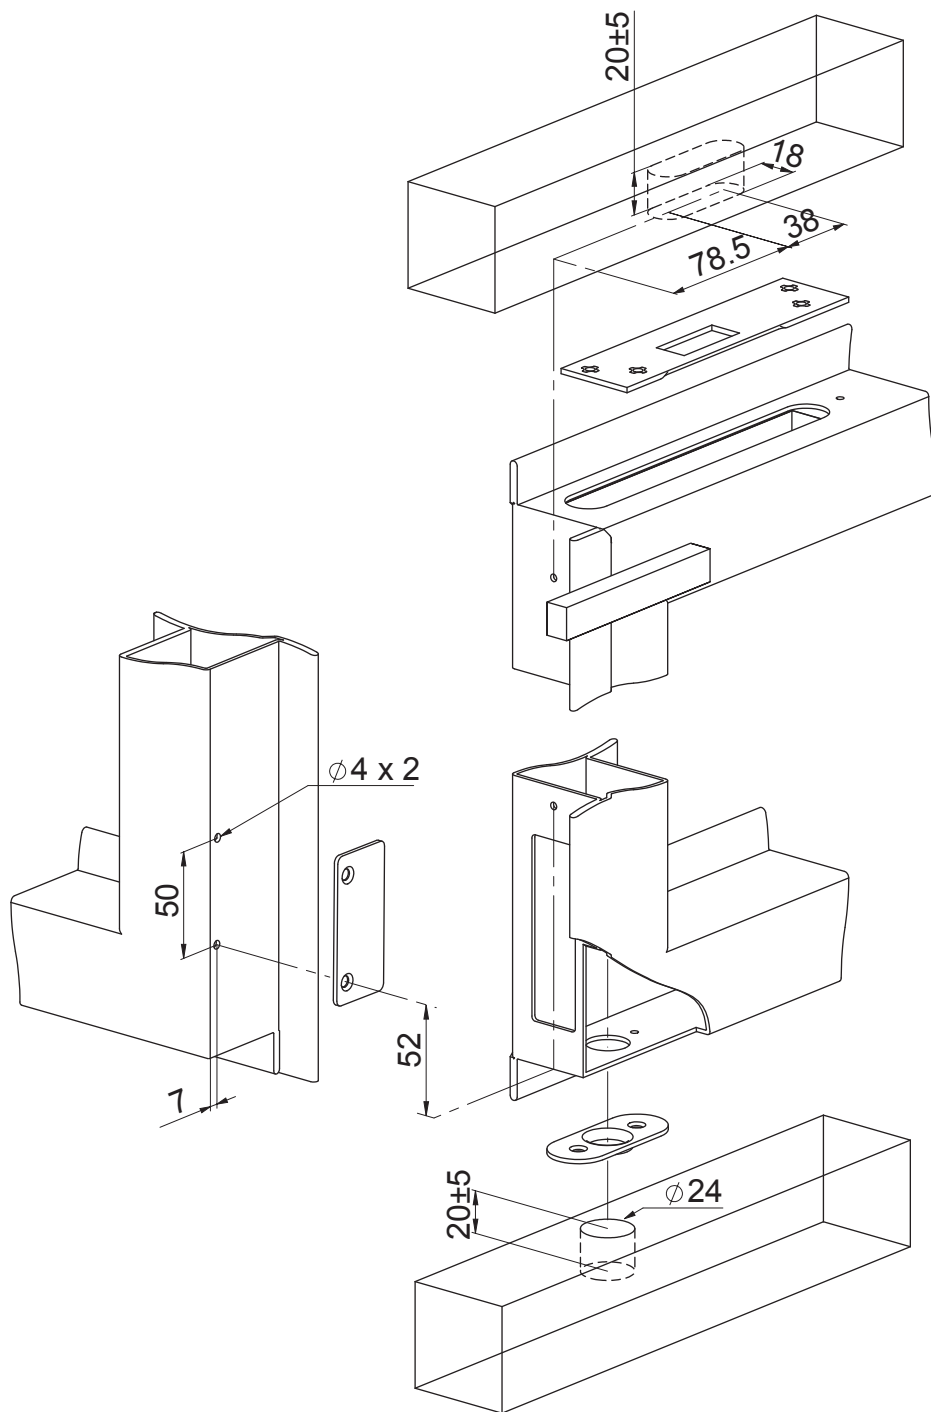


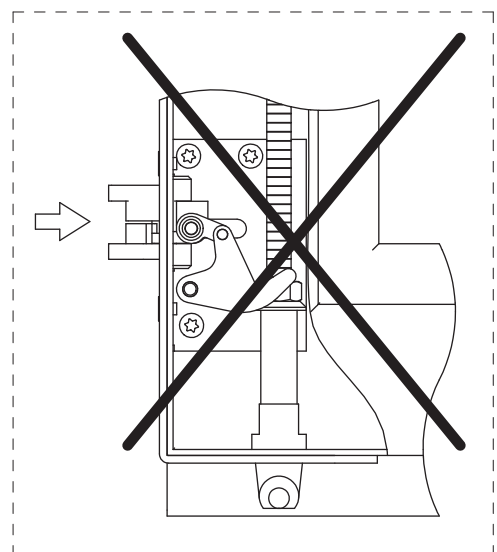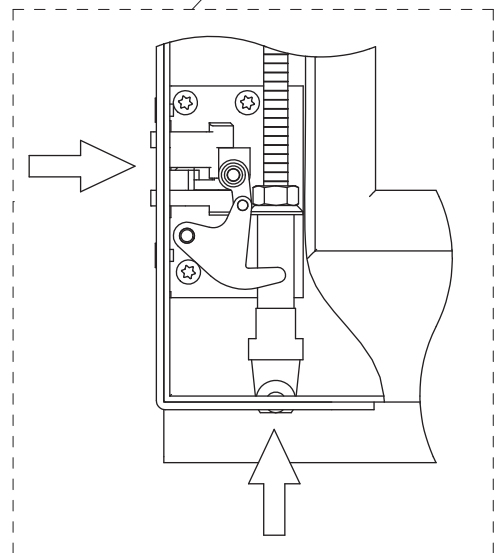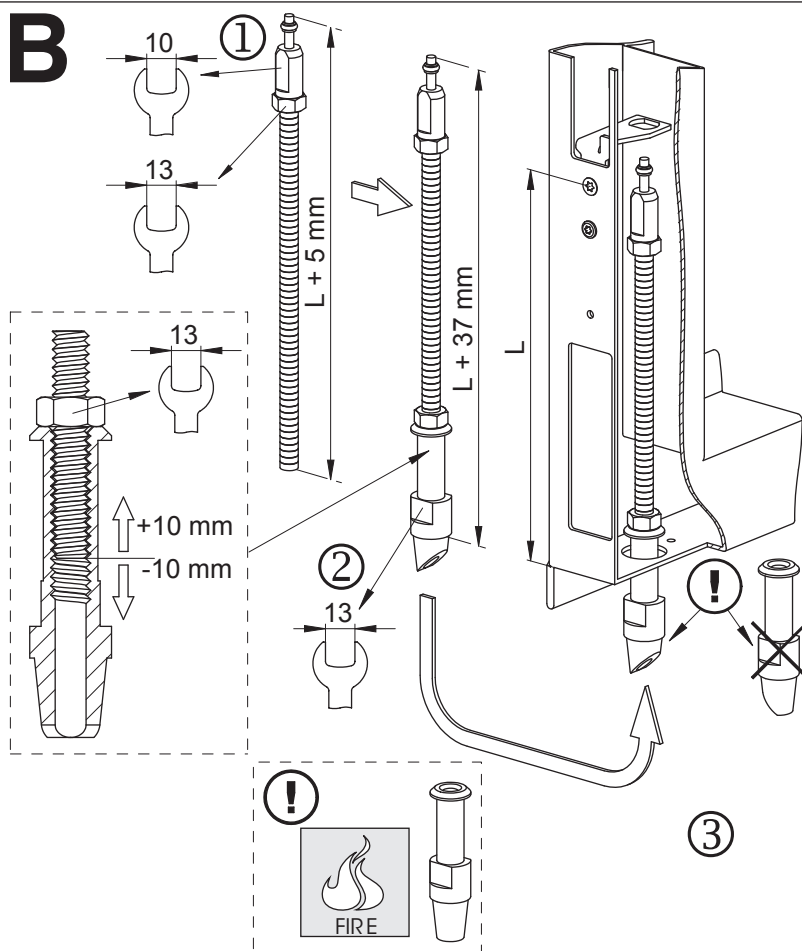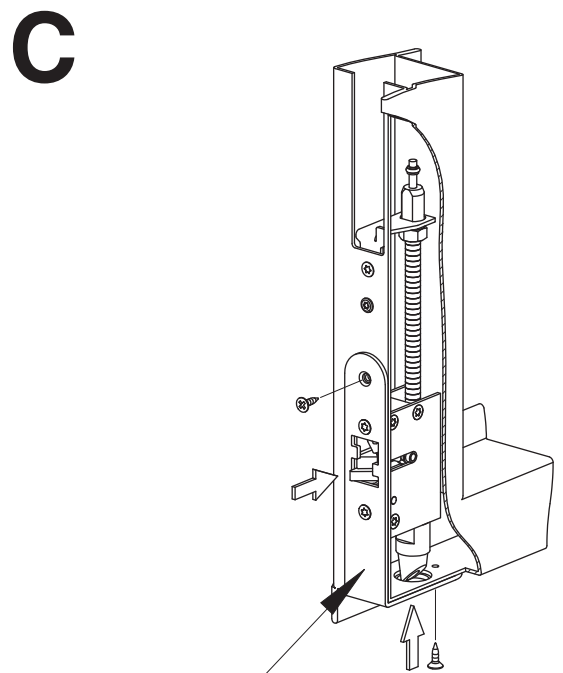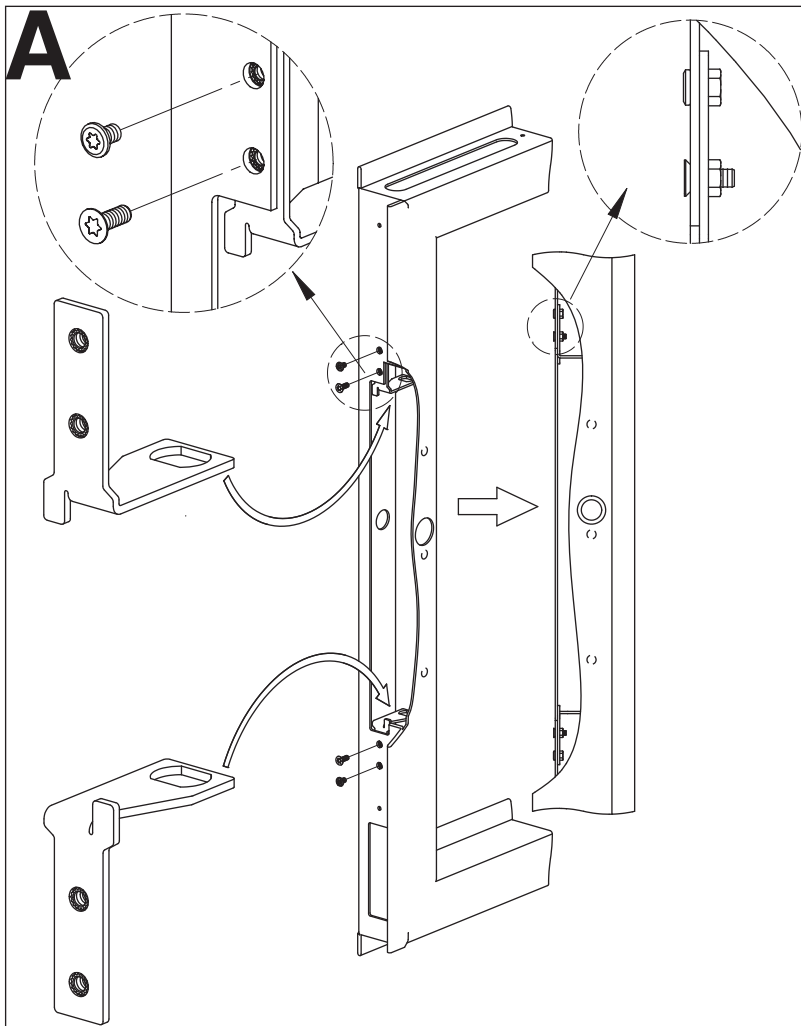


D

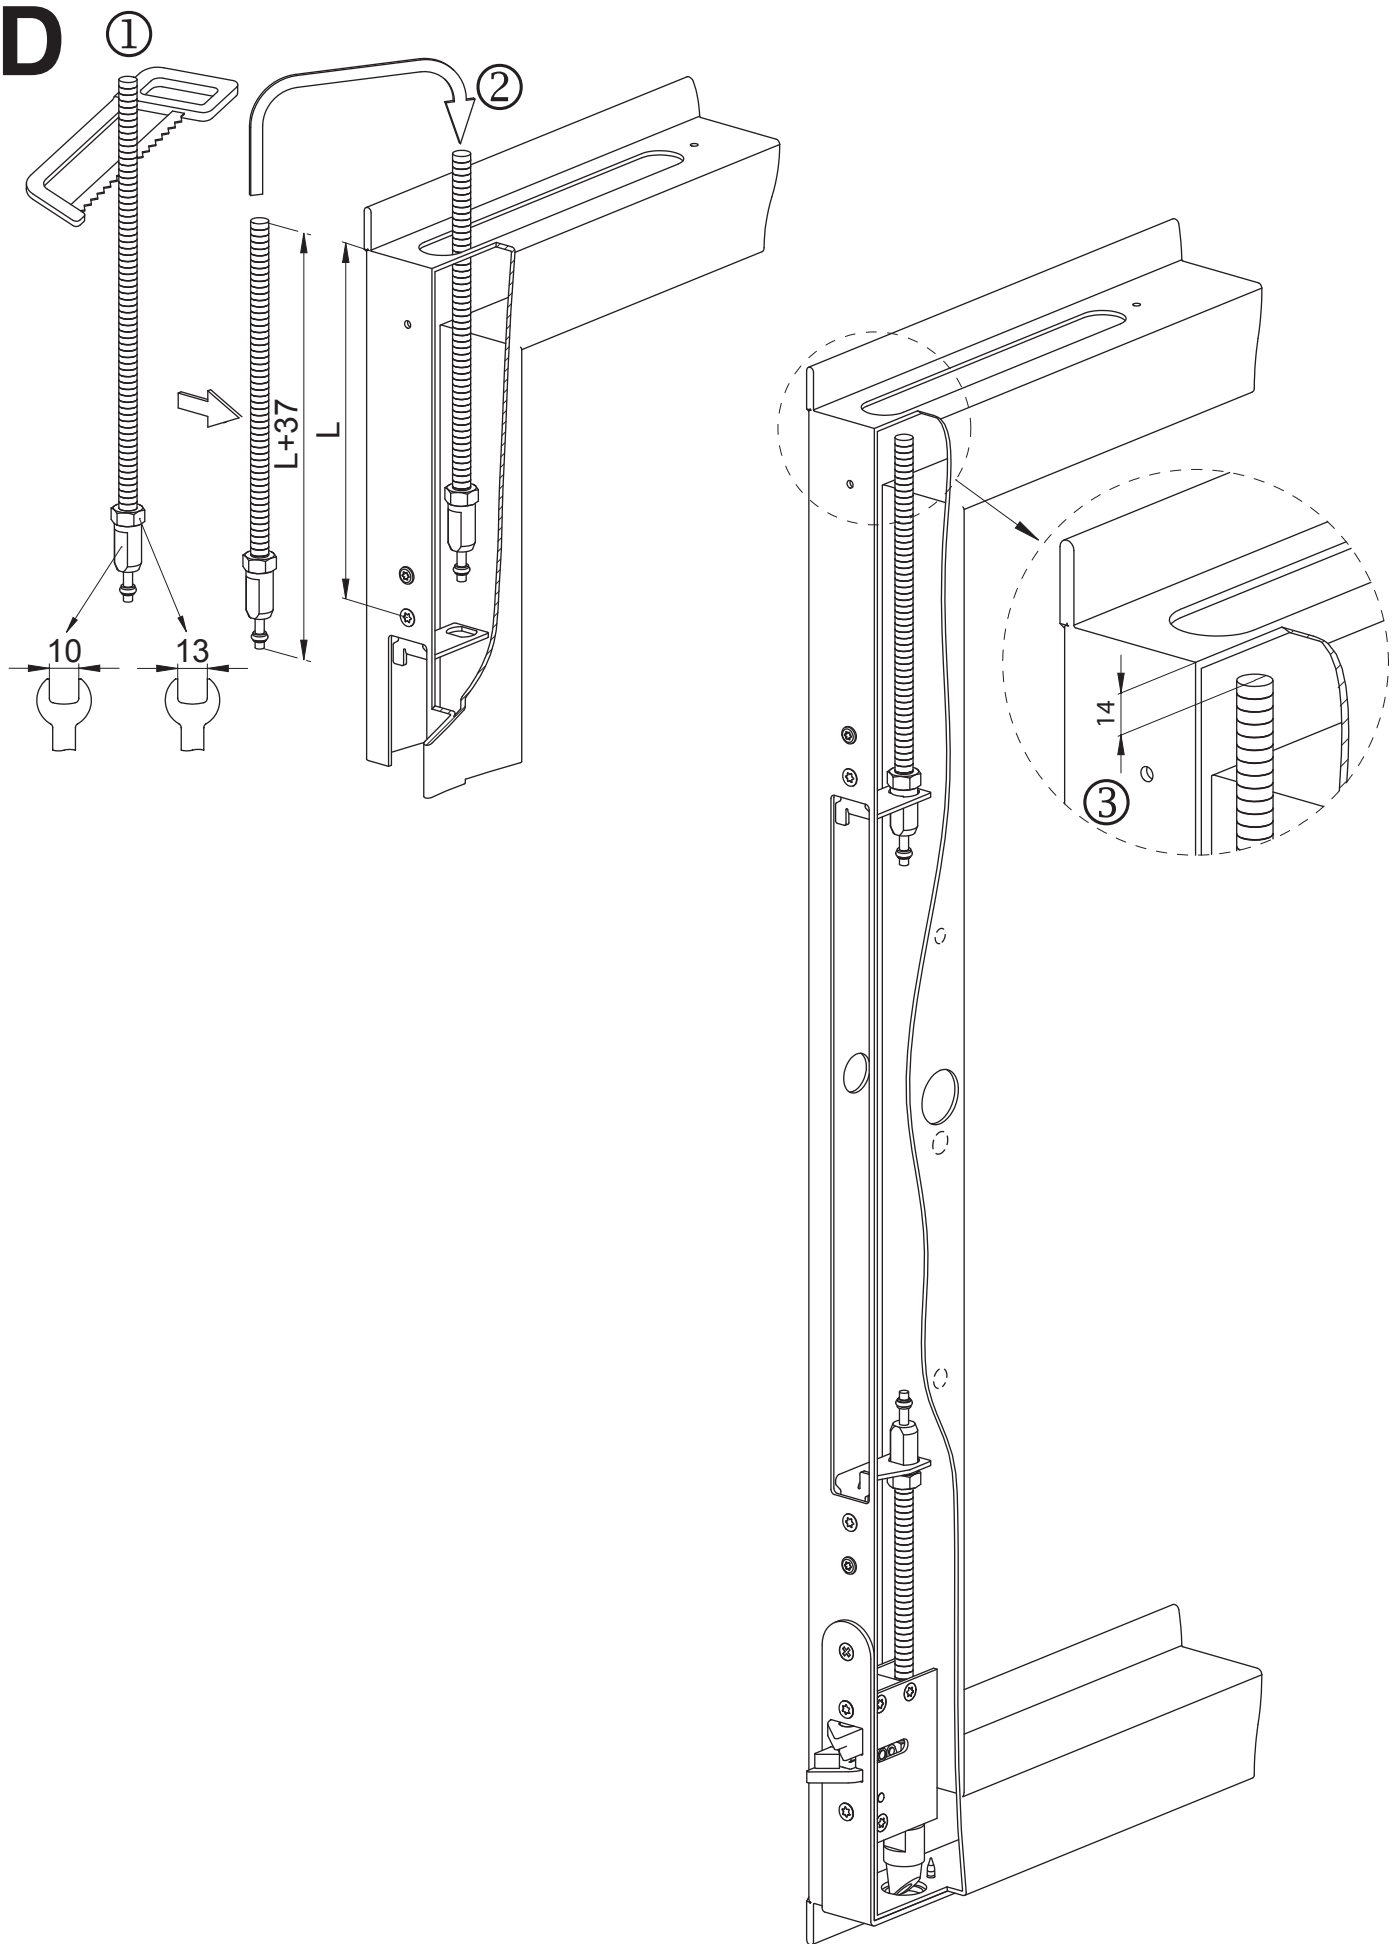


E

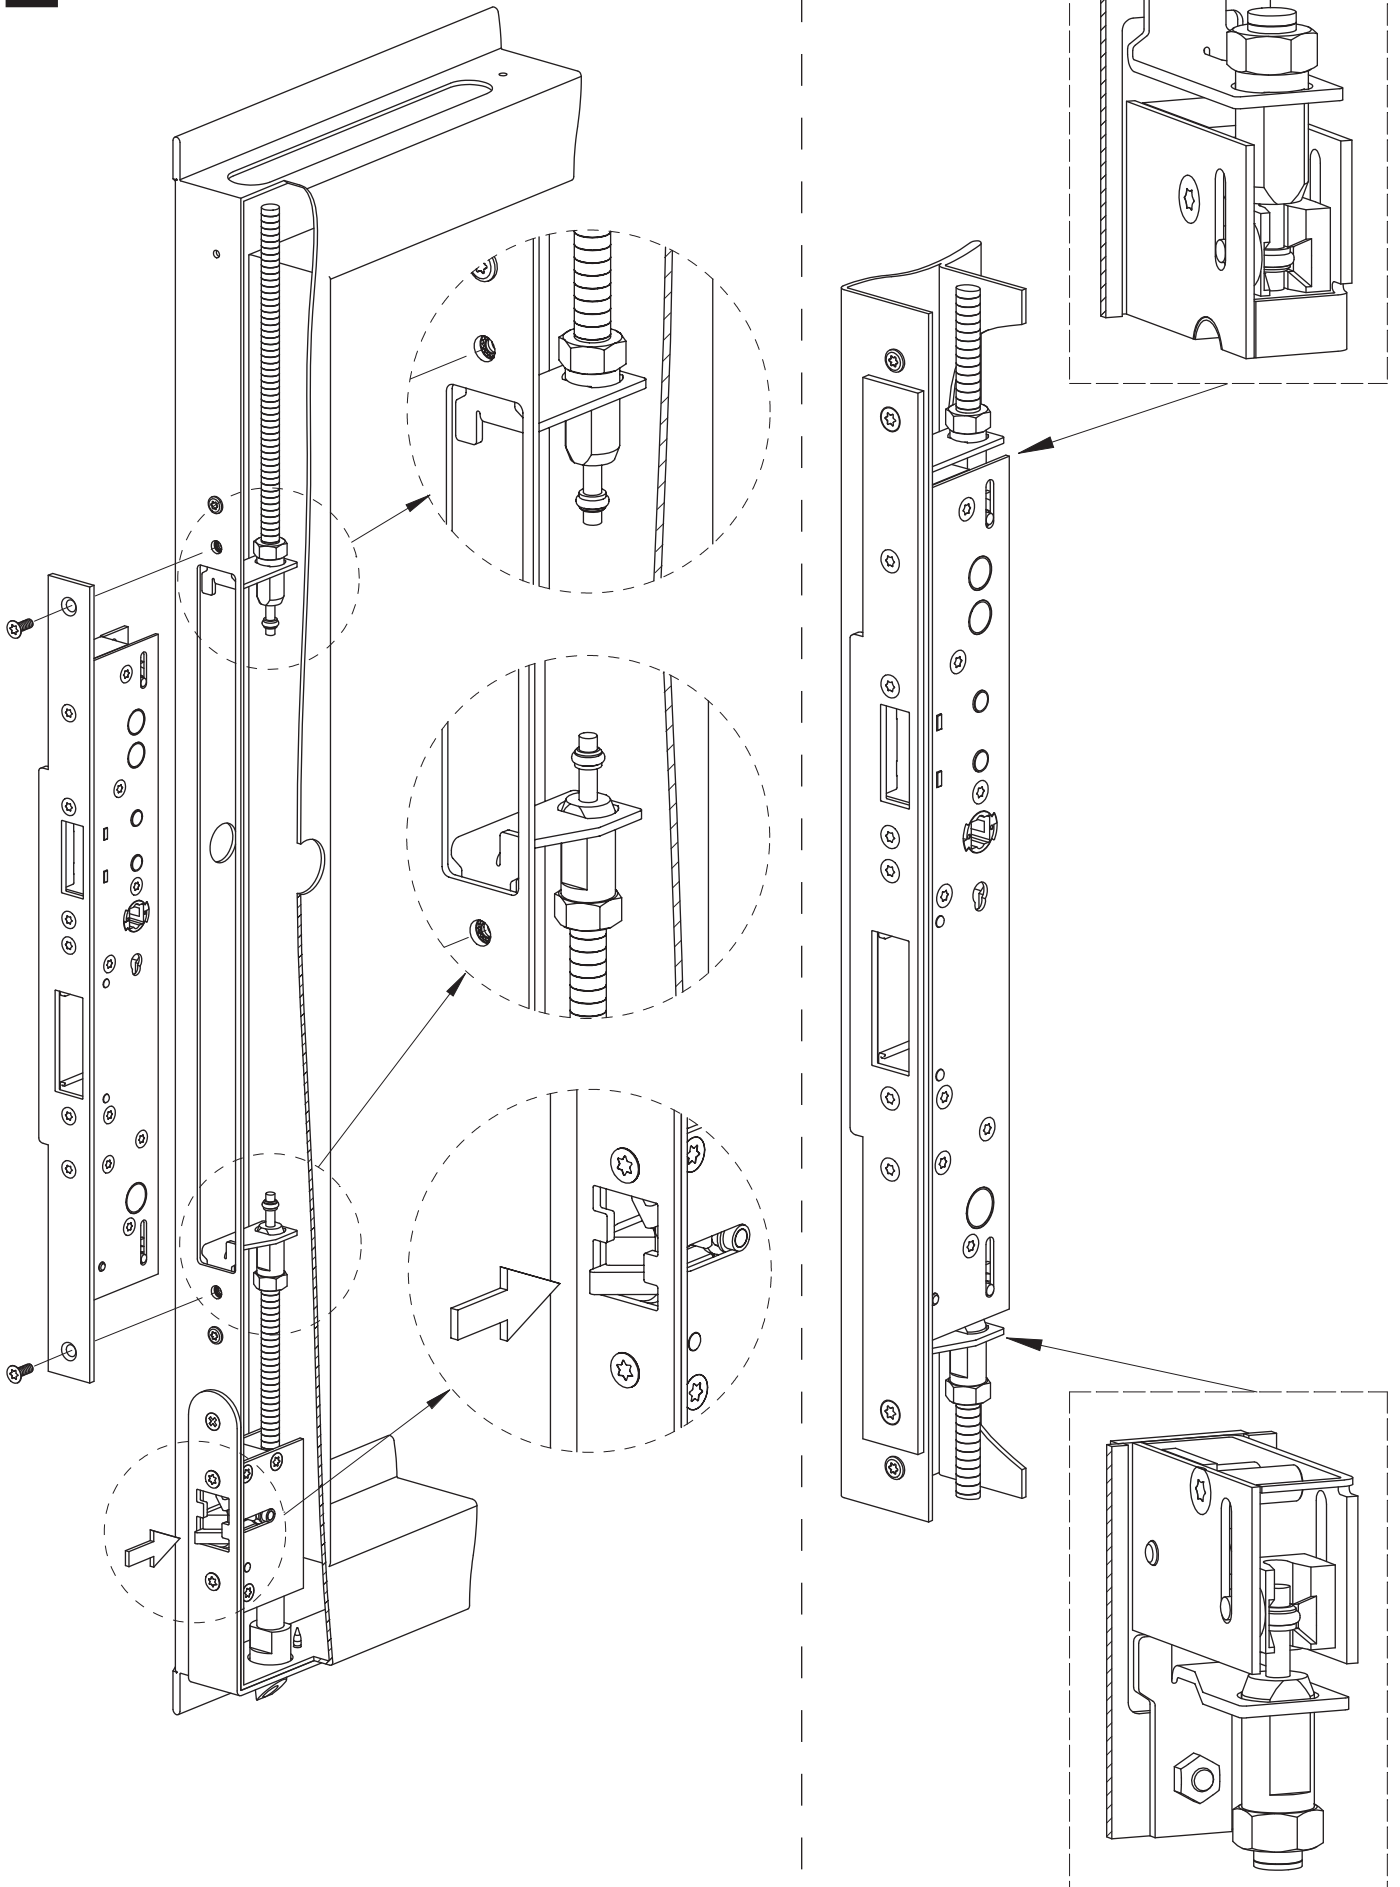


F

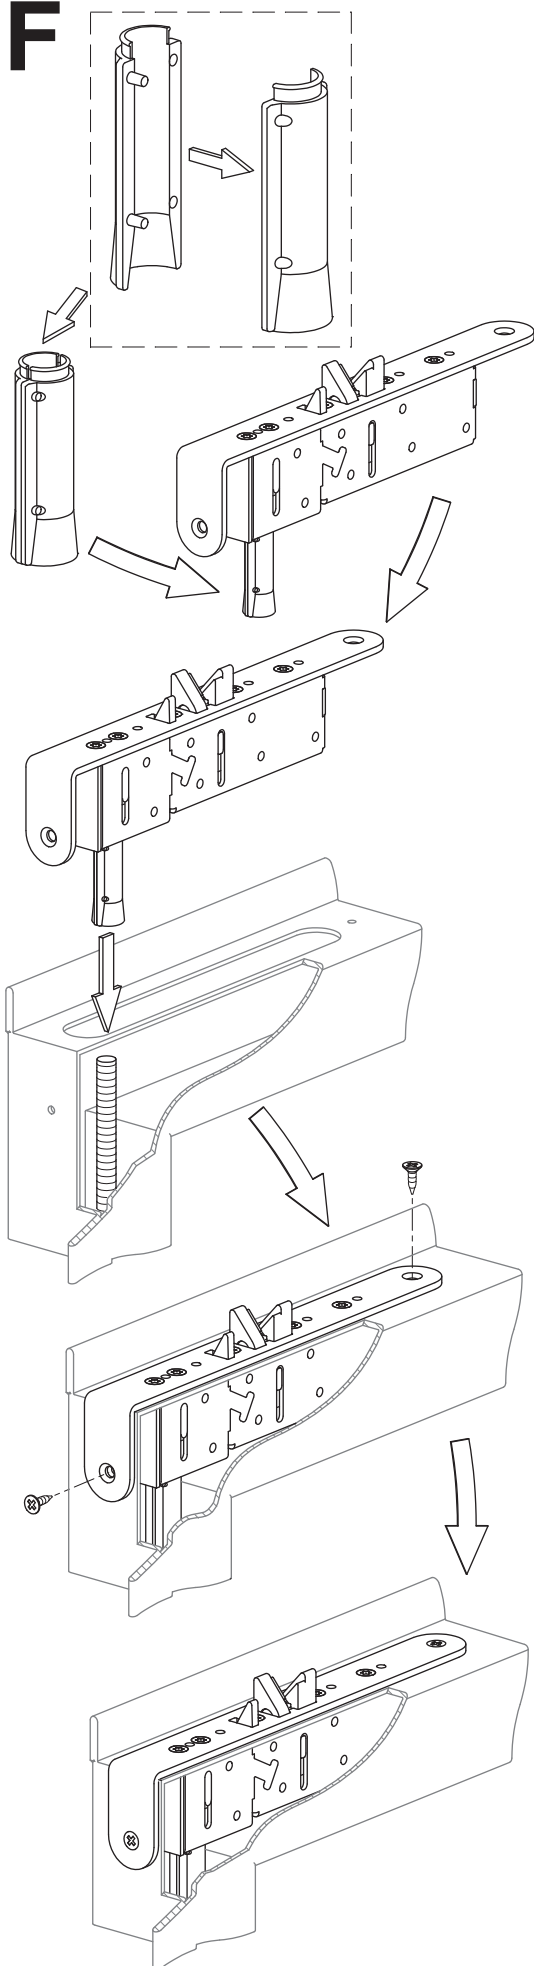


G

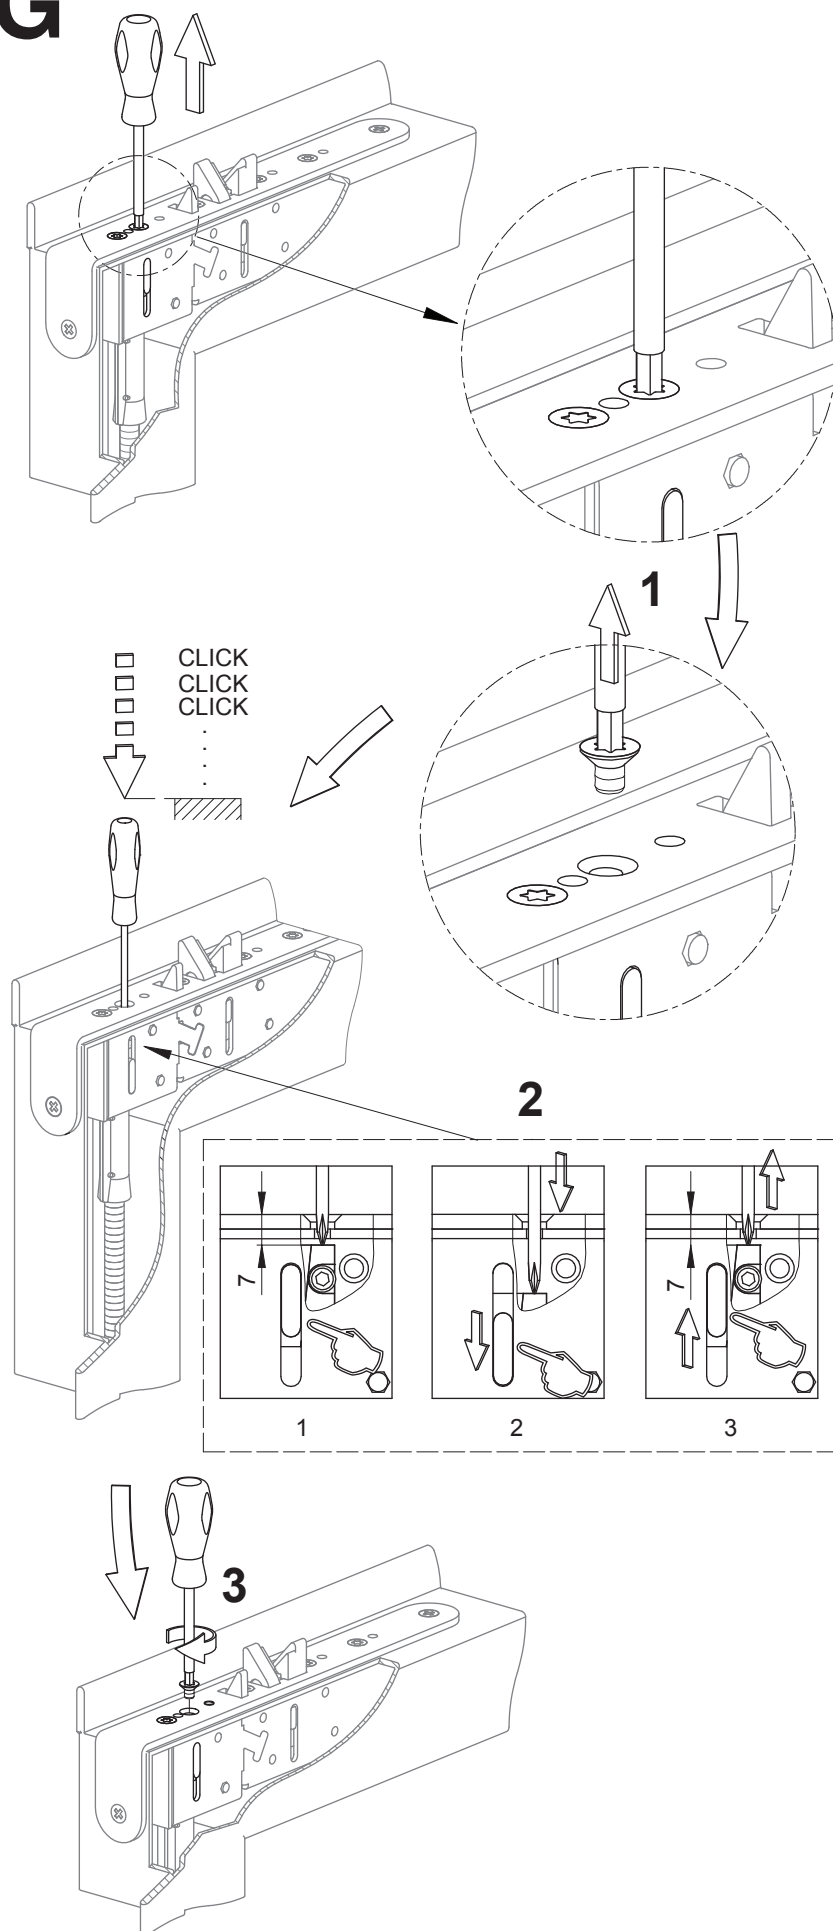

H

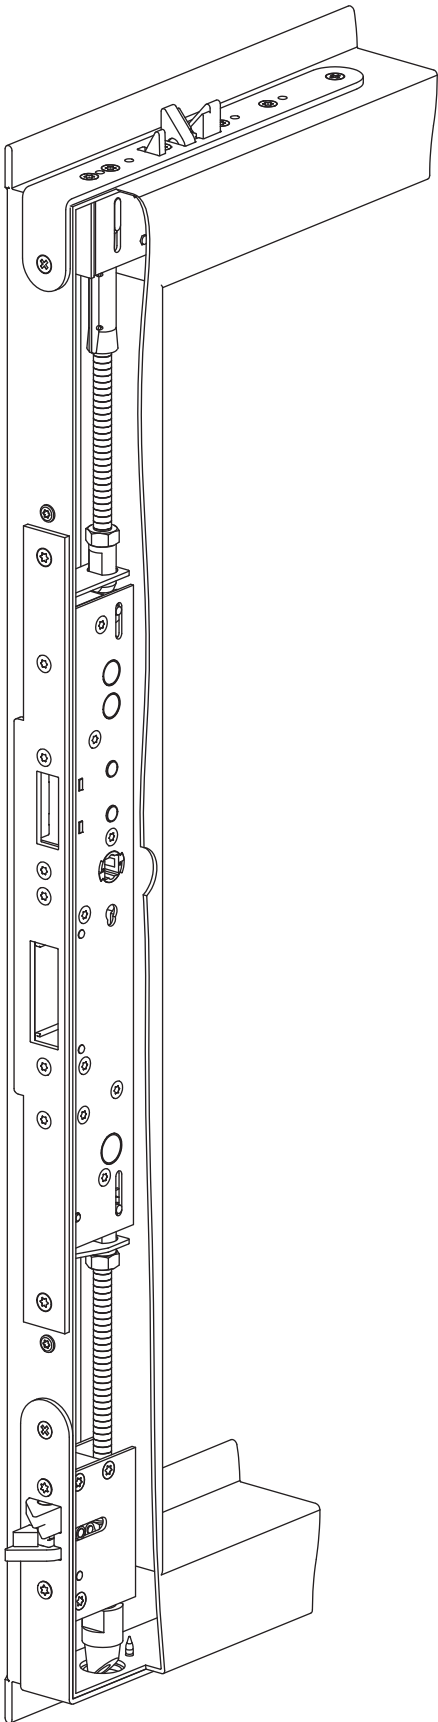

I

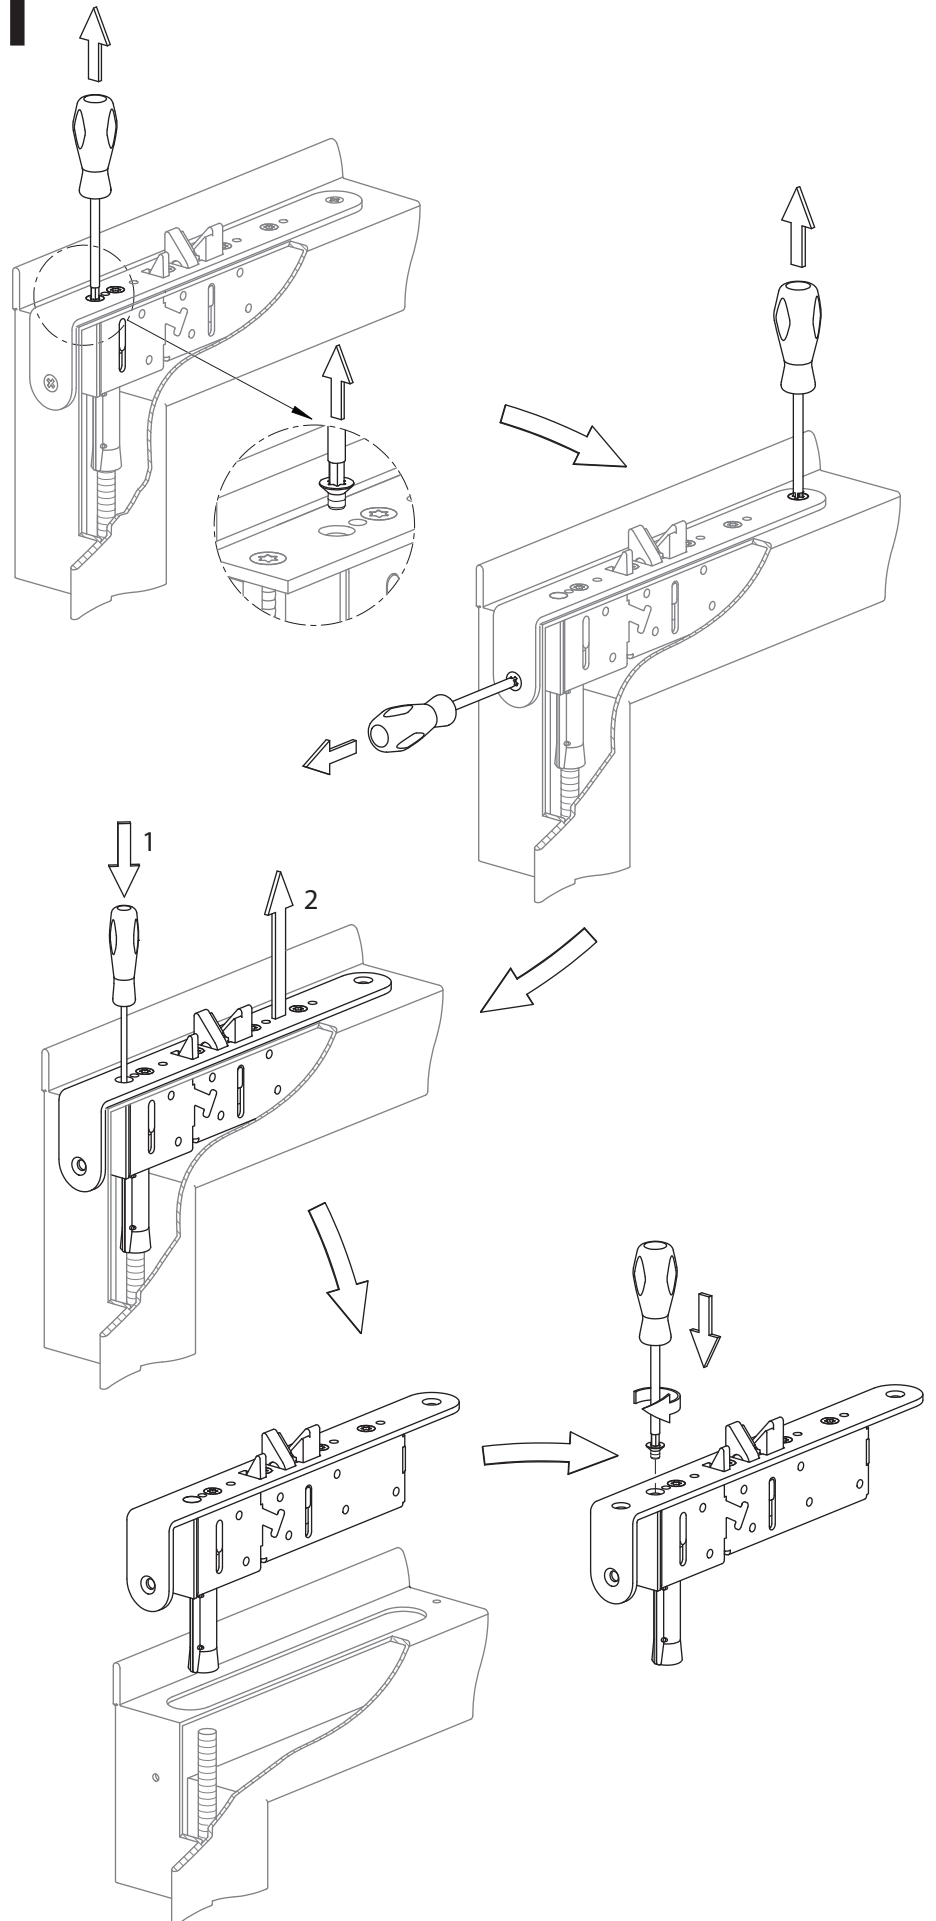


PE941

U: 12 (-10%) – 24 (+15 %) V DC STAB		
I :	Max.	Normal
12 VDC	550 mA	240 mA
24 VDC	270 mA	110 mA

max. 0.4 A 30 V AC / V DC resist. max. 10 W	Microswitch
--	-------------






EN 14846
-25 °C - +70 °C

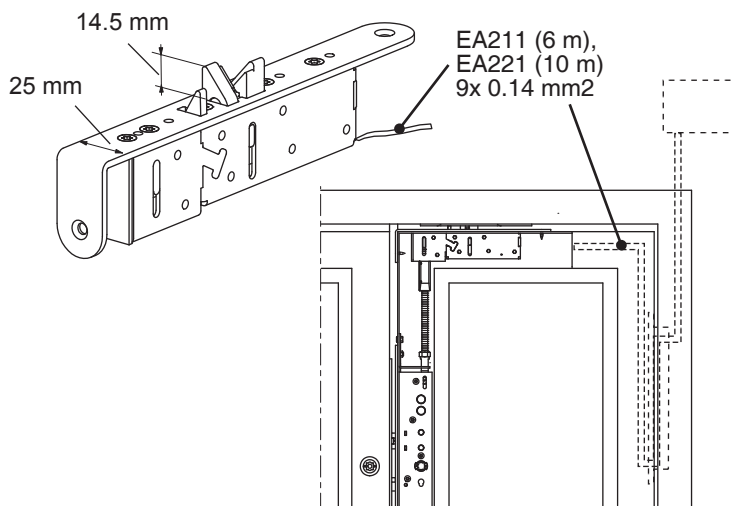

		①	Red
C	Common	②	Black
L	Locked	③	Yellow
O	Open	④	Blue
		⑤	Green

LOCK CASE INCLUDES PROTECTION DIODES. MAXIMUM VALUES FOR MICRO SWITCHES: max. 0.4 A 30 V AC / V DC resist. max. 10 W. NO VALUES TO BE EXCEEDED.

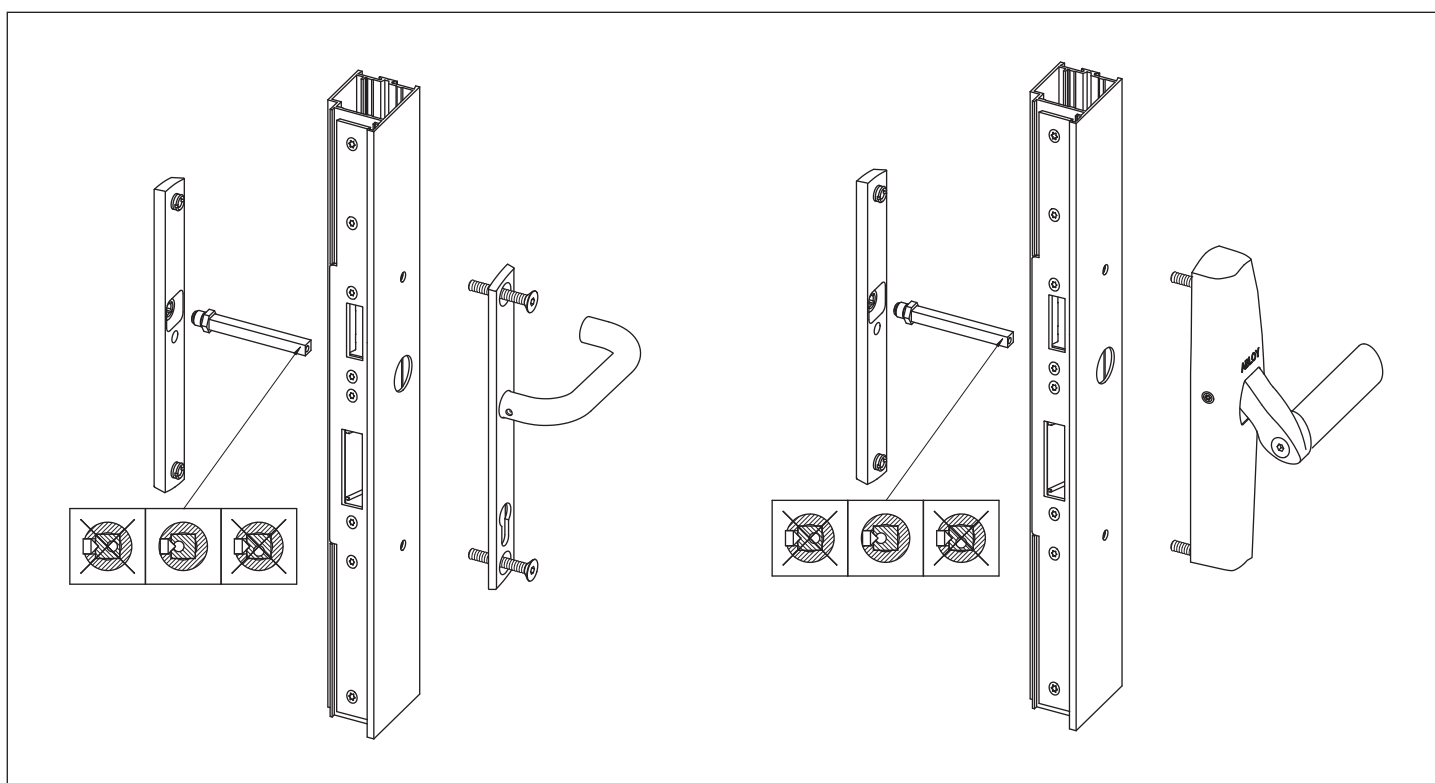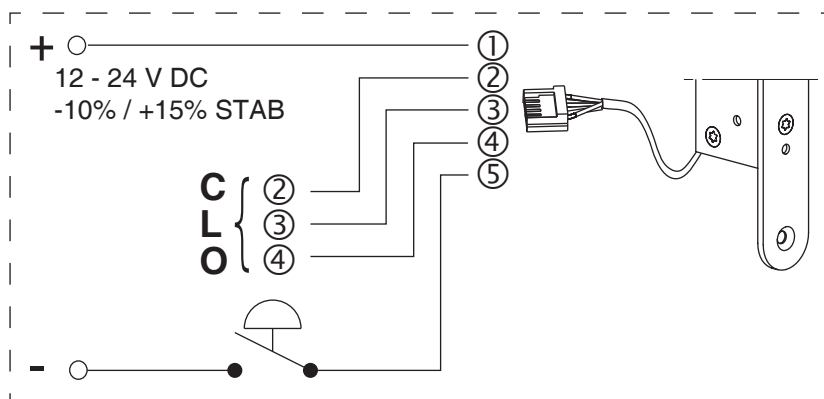



This product contains materials, such as electronics, which require specialist recycling techniques. When the product is taken out of use, disassemble it and sort and recycle the different materials as per valid recycling instructions.

STR/12.06.2013/mD

We reserve the right to make alterations to the products described in this leaflet.



www.abloy.com

Abloy Oy
Wahlforssinkatu 20
P.O. Box 108
FI-80101 JOENSUU
FINLAND
Tel. +358 20 599 2501
Fax +358 20 599 2209



Nimike
952666
Päiväys
06/2013